


GF-KSW(N)-XX



Description

Optic fiber boxes is applicable PLC coupler to a terminal access links FTTH access system. It is especially for connecting and protection for fiber cable for FTTH.

This terminal box applies to the communications room and various network room wall installation or desktop installation. FTTH insert optical splitter box, arc, horizontal type, SMC, 4 fiber cable inlet/outlet ports, can be installed 1*32 PLC splitter (insert type), including 1 tray with 12 cores, with wall mounting bracket or pole mounting bracket, L425mm*W305mm*H170mm (OEM,ODM is welcome) .

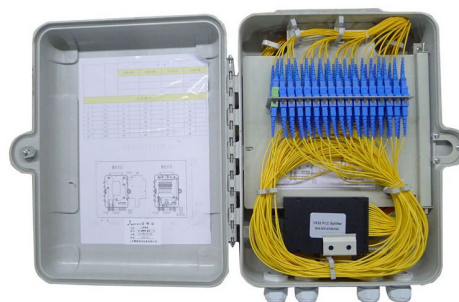

Feature

- ◆ SMC material
- ◆ Outdoor type
- ◆ Optical wiring function
- ◆ 4~48 cores
- ◆ High reliability.

Electrical performance

Item	Specification
Environment Temperature	-25°C~+55°C
Relative Humidity	<85%(when the temperature is below 30)
Atmospheric Pressure	70-106KPa
Insulation Resistance	$\geq 2 \times 10^4 \text{M}\Omega/500\text{VDC}$
Voltage Resistance Strength	NON-puncture,no arc-cover under 3KVDC/1min
Insertion Loss	PC>40dB, UPC>50dB, APC>60dB
Connection Life Span	>1000 times

Application

- ◆ FTTX