


Description

FTTH Wall Outlet 86 type can be multi-use to achieve a variety of fiber optic cable in multi-mode access, and fixed fiber optic cable. No additional insertion loss, protection of optical fiber and cable reduce the potential risk, simple and convenient for construction.

Feature

- ◆ Compatible with $\Phi 0.2$ - $\Phi 3.0$ mm pigtail & 3.1x2.0mm indoor drop cable
- ◆ Compatible with SC & FC adapter, optical fast connectors
- ◆ Simple, easy to use
- ◆ Snap on cover

Structure

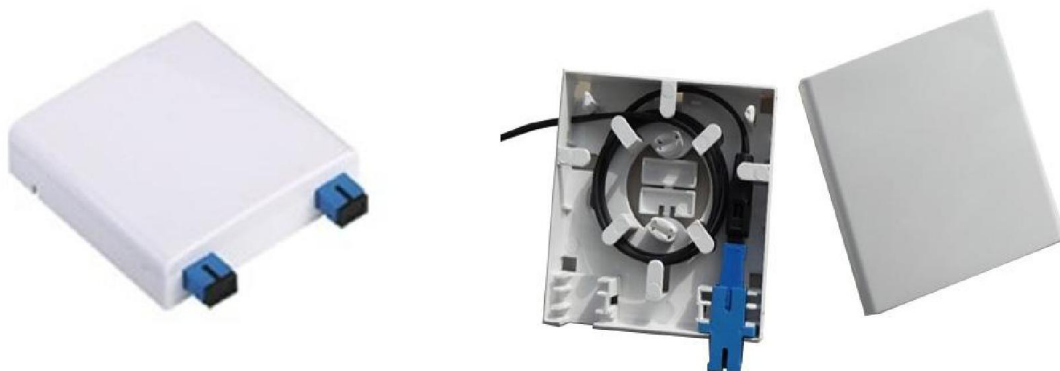

General

- ◆ Surface mounted fiber panel
- ◆ Tensile strength: >50N
- ◆ Operating Temperature: -40 ~ +75 °C
- ◆ Dimension: 86mm × 86mm × 23mm

Application

- ◆ FTTX applications
- ◆ Single mode
- ◆ Wall mount or fiber distribution